

# Colonne di guida lisce tipo "N"

- Materiale: 16 Cr Ni 4
- Esecuzione: cementate, temprate, rettificata
- Tolleranza: d h5
- Durezza: HRC 60/62


Colonne N  
16 x 95  
63 x 400

Cod.  
1CO  
1CO

Mat.  
N  
N

Mis.  
16095  
63400

Made in Italy

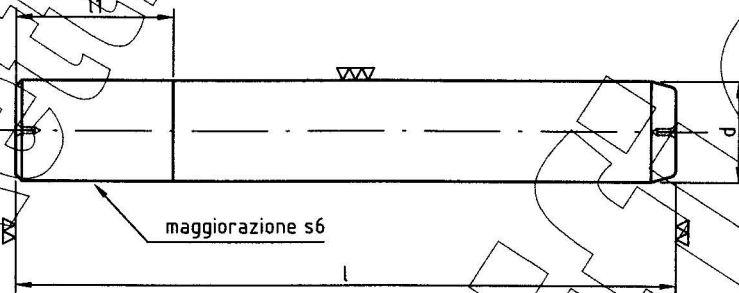

d	l	ll		d	l	ll		d	l	ll		
15/16	85	18	•	21/22	115	20	•	40/41	145	35	•	
	95		•		125		•		155		•	
	105		•		135		•		170		•	
	115		•		145		•		185		•	
	125		•		155		•		200		•	
	135		•		170		•		225		•	
	145		•		185		•		250		•	
	155		•		200		•		275		•	
	17/18		18		•		24/25		115		25	•
95	•	125		•	325	•						
105	•	135		•	350	•						
115	•	145		•	400	•						
125	•	155		•	170	•						
135	•	170		•	185	•						
145	•	185		•	200	•						
155	•	200		•	225	•						
170	•	225		•	250	•						
185	•	250	•	275	•							
200	•	115	•	300	•	50	•					
19/20	20	•	30/31	125	25		•	63	325	60	•	
		95		•			135		•		350	•
		105		•			145		•		400	•
		115		•			155		•		225	•
		125		•			170		•		250	•
		135		•			185		•		275	•
		145		•			200		•		300	•
		155		•			225		•		325	•
		170		•		250	•		350		•	
185	•	275	•	400	•							
200	•	300	•									

\* Si costruiscono a richiesta colonne diametro 34/35 e 45/46 mm.