

Cannocchiali temprati per estrazioni

- Materiale: 1.2067
- Tolleranza: b H5 d g6
- Durezza: HRC 58/60


Cannocchiali temprati
1.5 x 75
8 x 225

Cod.
3CAN
3CAN

Mat.
T
T

Mis.
015075
080225

Made in Italy

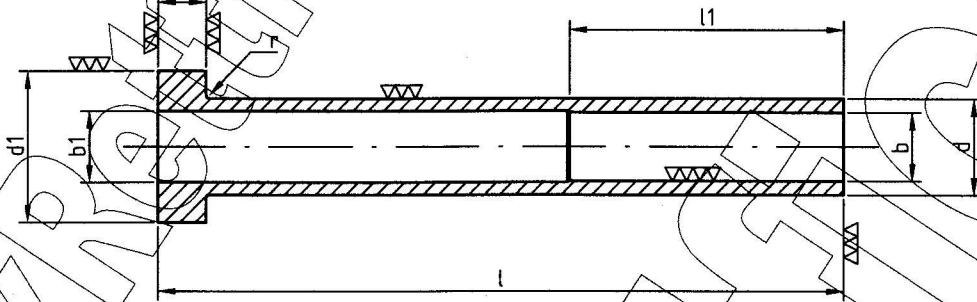

b	d	b1	d1	k	l1	l													
						50	75	100	125	150	175	200	225	250					
0.8	2	1.2	5	2	25	•	•												
1	2.5	1.4				•	•												
1.1		1.5				•	•												
1.2		1.6				•	•	•											
1.3		1.7				•	•	•											
1.4		1.8				•	•	•	•										
1.5	3	1.9	6	3	35	•	•	•	•	•									
1.6		2.0				•	•	•	•	•									
1.7		2.1				•	•	•	•	•	•								
1.8		2.2				•	•	•	•	•	•	•							
1.9	4	2.3	8	3	35	•	•	•	•	•	•	•	•	•	•	•			
2		2.4				•	•	•	•	•	•	•	•	•	•	•	•	•	
2.2		2.6				•	•	•	•	•	•	•	•	•	•	•	•	•	•
2.5	5	2.9	10	3	35	•	•	•	•	•	•	•	•	•	•	•			
2.7		3.1				•	•	•	•	•	•	•	•	•	•	•	•	•	
3	6	3.4	12	3	35	•	•	•	•	•	•	•	•	•	•	•			
3.2		3.6				•	•	•	•	•	•	•	•	•	•	•	•	•	
3.5		3.9				•	•	•	•	•	•	•	•	•	•	•	•	•	•
3.7	8	4.1	14	5	45	•	•	•	•	•	•	•	•	•	•	•			
4		4.4				•	•	•	•	•	•	•	•	•	•	•	•	•	
4.2	10	4.6	16	5	45	•	•	•	•	•	•	•	•	•	•	•			
4.5		4.9				•	•	•	•	•	•	•	•	•	•	•	•	•	
5		5.4				•	•	•	•	•	•	•	•	•	•	•	•	•	
5.2	12	5.6	22	7	50	•	•	•	•	•	•	•	•	•	•	•			
5.5		5.9				•	•	•	•	•	•	•	•	•	•	•	•	•	
6	14	6.4	22	7	50	•	•	•	•	•	•	•	•	•	•	•			
6.2		6.6				•	•	•	•	•	•	•	•	•	•	•	•	•	
6.5		6.9				•	•	•	•	•	•	•	•	•	•	•	•	•	
8	16	8.4	22	7	50	•	•	•	•	•	•	•	•	•	•	•			
8.2		8.6				•	•	•	•	•	•	•	•	•	•	•	•	•	
8.5	18	8.9	22	7	50	•	•	•	•	•	•	•	•	•	•	•			
10		10.4				•	•	•	•	•	•	•	•	•	•	•	•	•	
10.2	20	10.6	22	7	50	•	•	•	•	•	•	•	•	•	•	•			
10.5		10.9				•	•	•	•	•	•	•	•	•	•	•	•	•	
12	22	12.4	22	7	50	•	•	•	•	•	•	•	•	•	•	•			

* Disponibile a magazzino come semilavorato, misure non a catalogo intercambiabili HASCO.

* Si costruiscono su richiesta cannocchiali a disegno.