

Estrattori testa cilindrica DIN 1530 lamellari temprati – nitrurati




- Materiale: temprati 1.2067 – nitrurati 1.2344 / 41 CrAlMo7
- Tolleranza: d g6 a +0 / -0.015 b +0 / -0.015
- Durezza: temprati HRC 58/62 – nitrurati 1000 / 1100 Vickers

Estrattori lamellari
4.2 x 1.2 x 3.8 x 80
16 x 2.5 x 15.5 x 400

Cod.	Mat.	Mis.
2ETC	LT	042012080
2ETC	LN	160025400

Made in Italy

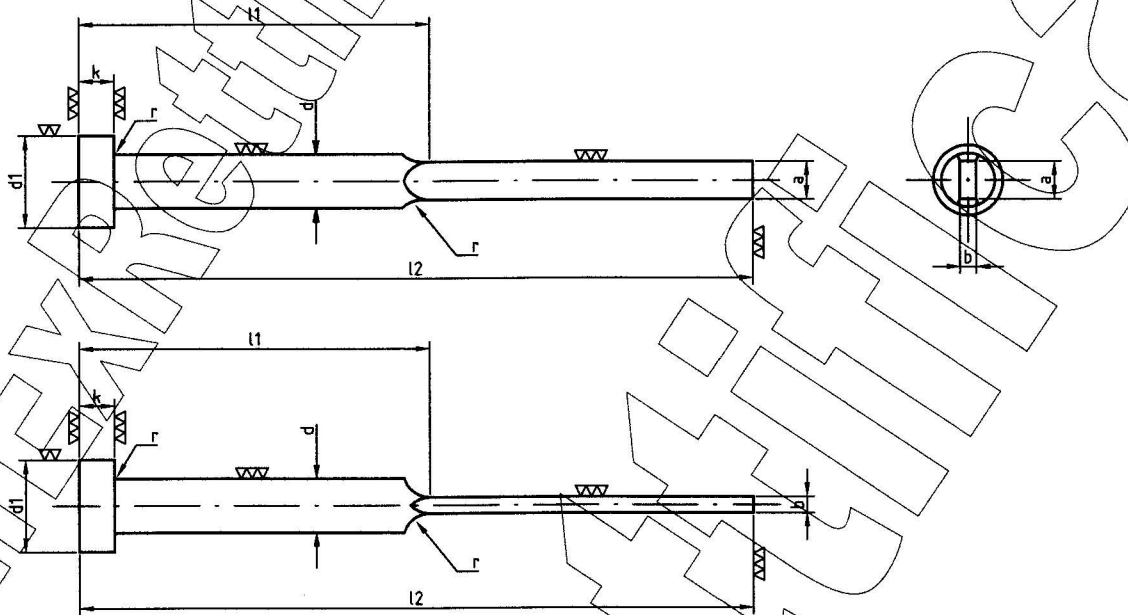

d	a	b	d1	k	11 30	11 40	11 50	11 60	11 80	11 100	11 125	11 160	11 200
					160	180	1100	1125	1160	1200	1250	1315	1400
4	3.5	1	8	3	•	•	•	•					
4.2	3.8	1.2			•	•	•	•	•				
5	4.5	1	10	3	•	•	•	•	•	•			
		1.2			•	•	•	•	•	•			
		1.5			•	•	•	•	•	•	•		
6	5.5	1	12	3	•	•	•	•	•	•	•		
		1.2			•	•	•	•	•	•	•		
		1.5			•	•	•	•	•	•	•	•	
		2			•	•	•	•	•	•	•	•	•
8	7.5	1.2	14	5	•	•	•	•	•	•	•	•	
		1.5			•	•	•	•	•	•	•	•	•
		2			•	•	•	•	•	•	•	•	•
10	9.5	1.5	16	5	•	•	•	•	•	•	•	•	
		2			•	•	•	•	•	•	•	•	•
12	11.5	2	18	7	•	•	•	•	•	•	•	•	
		2.5			•	•	•	•	•	•	•	•	•
16	15.5	2	22	7	•	•	•	•	•	•	•	•	
		2.5			•	•	•	•	•	•	•	•	•

* Per estrattori lamellari nitrurati + 15%.