

Punzoni testa rinforzata HSS

- Materiale: 1.3343 – HSS
- Tolleranza: d h6
- Durezza: HRC 61/64


Punzoni tr hss
2 x 80
32 x 100

Cod.
3PUTR
3PUTR

Mat.
HSS
HSS

Mis.
0200080
3200100

Made in Italy

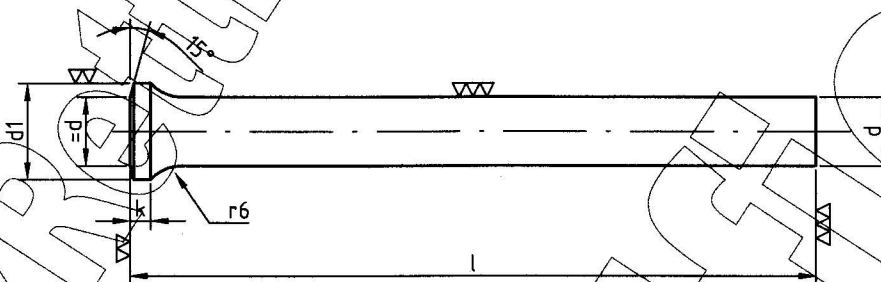

d	d1	k	1.3343 – HSS			d	d1	k	1.3343 – HSS		
			l	l	l				l	l	l
			80	100	125				80	100	125
2	3.2	2	•	•		14.5 – 15	19	4	•	•	•
2.5	3.8		•	•		15.5 – 16	20		•	•	•
3	5		•	•		17	21		•	•	•
3.5	6		•	•		18	22		•	•	•
4	6.5	3	•	•		19	23	•	•	•	
4.5	7		•	•		20	24	•	•	•	
5	8		•	•		21	25	•	•	•	
5.5	8.5		•	•		22	26	•	•	•	
6	9		•	•	•	23	27	•	•	•	
6.5 – 7	10		•	•	•	24	28	•	•	•	
7.5 – 8	11		•	•	•	25	29	•	•	•	
8.5 – 9	13	4	•	•	•	26	30	•	•	•	
9.5 – 10	14		•	•	•	27	31	•	•	•	
10.5 – 11	15		•	•	•	28	32	•	•	•	
11.5 – 12	16		•	•	•	29	33	•	•	•	
12.5 – 13	17		•	•	•	30	34	•	•	•	
13.5 – 14	18		•	•	•	32	36	•	•	•	

- * Per punzoni testa rinforzate **L 125** disponibili solo misure piene.
- * Si forniscono a richiesta frese per esecuzione sedi punzoni, **vedere pagina 1.9.**
- * Si costruiscono a richiesta punzoni ribassati, **vedere pagina 1.11.**