

Colonne per stampi plastica tipo "PTR" con guida spallata

- ❑ Materiale: 16 Ni Cr 4
- ❑ Esecuzione: cementate, temprate, retificate
- ❑ Tolleranza: d g6
- ❑ Durezza: HRC 60/62


Colonne PTR
16 x 36 x 80
Est. 34 25 x 96 x 200

Cod.
1CO
1COPTR

Mat.
PTR
E34

Mis.
16036980
25096200

Made in Italy

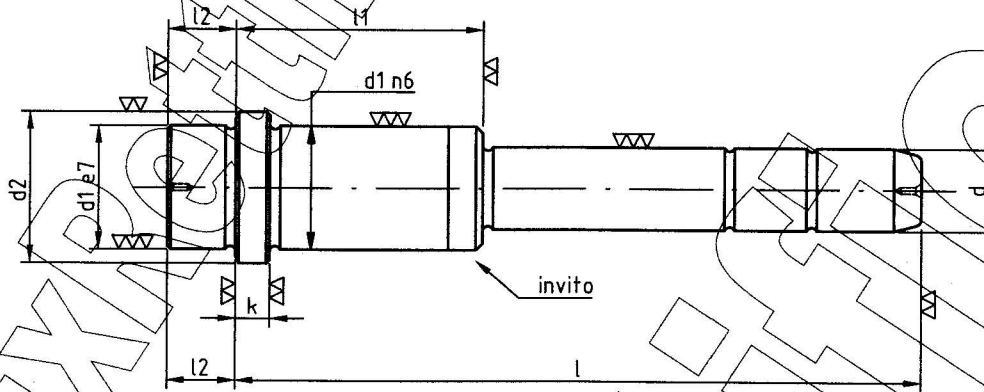

d	d1	d2	k	l2	l1	l									
						70	80	100	120	140	160	180	200	220	
16	22	26	5	10	26	•	•	•	•	•					
					36	•	•	•	•	•					
					46		•	•	•	•	•				
					56			•	•	•	•	•			
					66				•	•	•	•	•		
					76					•	•	•	•	•	
20	30 28A	34 32A	6	10	36	•	•	•	•	•	•				
					46		•	•	•	•	•				
					56			•	•	•	•	•			
					66				•	•	•	•	•		
					76					•	•	•	•	•	
					96						•	•	•	•	
25	36 34A	40 38A	7	10	36		•	•	•	•	•	•			
					46			•	•	•	•	•			
					56				•	•	•	•	•		
					66					•	•	•	•	•	
					76						•	•	•	•	
					96							•	•	•	
32	40	45	7	10	36			•	•	•	•	•	•		
					46				•	•	•	•	•		
					56					•	•	•	•	•	
					66						•	•	•	•	
					76							•	•	•	
					96								•	•	
					106									•	
					116										•
40	48	52	8	10	46				•	•	•	•	•		
					56					•	•	•	•		
					66						•	•	•		
					76							•	•		
					96								•		

A Specificare questo diametro esterno.